

# INFINITE




## SYSTEMS

### CXD 15ND V/H

Large Venue, Bi-amplified, 3-Way Full Range High Efficiency speaker system, trapezoidal Baltic Birch Plywood enclosure loaded with Dual 15" NEODYMIUM magnetic Low-Frequency transducers, Coaxial NEODYMIUM magnetic Mid-High Range transducers, loaded on a 80° x 60° Large Format Constant Directivity horn. Factory installed rigging points, 316L Stainless Steel Grille, Black Textured Finish Color or also available in any custom color.



Available in both  
Vertical and Horizontal Versions

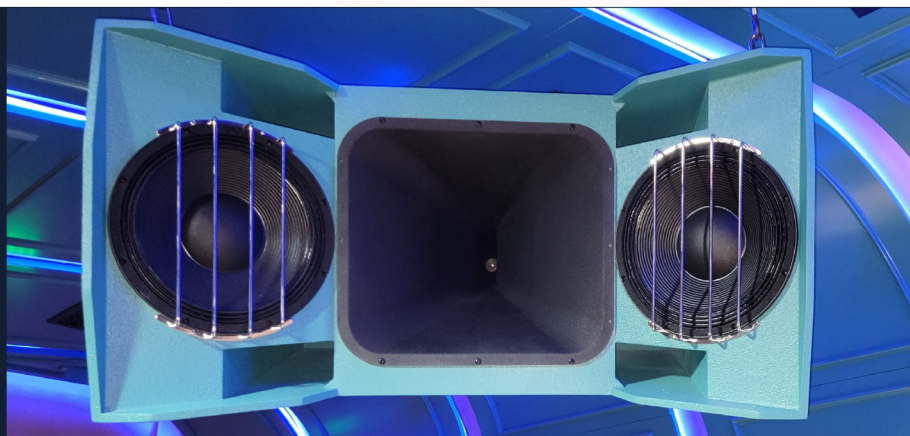

#### TECHNICAL DATA

##### Utility Configuration Nominal Impedance

Full-Range 3-Way Speaker System  
Horn Loaded MF/HF, Direct Radiating LF  
LF 4 ohm, MF/HF 8 ohm

##### Rated Power RMS Sensitivity 1W/1M

LF 3000W, MF 220W, HF 160W  
LF 98 db, MF 111.1 db, HF 111.4 db

##### Applied Range Coverage

26 Hz to 20 kHz  
80°x 60°

##### Connectors

NL-4

##### Net Weight

265 lbs

##### Finish Color

Black or Custom

##### Grille/Protection

Quad Steel Rod Chrome or Black

##### Warranty

60 Month Limited Commercial Warranty

##### Dimensions

27.55" W X 32.59" D X 48.66"H

#### WP WEATHER PROTECTED VERSION

- Constructed of Treated Exterior Composite wood panel, which is vermin, termite and mold resistant, without sounding like plastic or fiberglass.
- 316L Stainless Steel Grille for maximum corrosion resistance in the harshest environments.
- 1/4" acoustically transparent foam water stop layer.
- 100 micron 316L Stainless Steel Mesh for insect resistance in outdoor use within landscape environments.
- Weatherized component treatment for long term reliability.
- Watertight junction box for secure connections and vandal resistance on larger properties.
- All Stainless Steel Hardware for reliable, long term outdoor installation.